

Cis-2-pentene to cis-2-hexene and cis-2-butenen in Reactive Distillation column

Patel Bharvi Parulkumar

Sardar Vallabhbhai National Institute of Technology

Background & Description:


Reactive distillation is a process where the chemical reactor is also the still. Separation of the product from the reaction mixture does not need a separate distillation step which saves energy (for heating) and materials. The standard configuration of a reactive distillation column includes a rectification section, a reaction section and a stripping section. A set of reactive trays or reactive packing is used as a reaction section.

In this simulation, a reactive distillation column has been used that produced cis-2-butene and cis-2-hexene from cis-2-pentene. The pure reactant cis-2-pentene is fed to a reactive distillation column operating at a pressure of 3 atmospheres with 13 plates; the feed stage location is stage 5, the reactive stages go from stages 2 to 7. The feed flow rate is set to 100kmol/hr.

After simulation;

Cis-2-butene is a top product in this column and cis-2-hexene is a bottom product of this column. Whose molar composition are 0.9963 and 0.9999 as respectively get in this simulation.

Flowsheet:

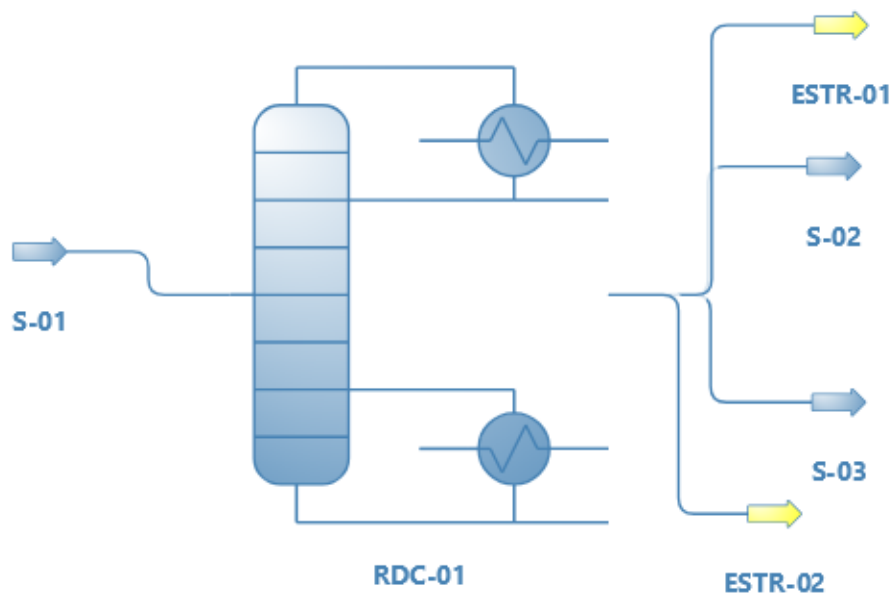

Results:

RESULT TABLE				
Object	S-01(FEED) (CIS-2- PENTENE)	S-03(BOTTOM PRODUCT) (CIS-2- HEXENE)	S-02 (TOP PRODUCT) (CIS-2-BUTENE)	
Temperature	73.20	107.375	36.5041	°C
Pressure	304	304	304	KPa
Molar Flow	100	49.8168	50.1832	kmol/h
Molar Fraction (Overall Liquid) / cis-2-butene	-	2.2616E-06	0.996347	
Molar Fraction (Overall Liquid) / cis-2-hexene	-	0.999998	0.00365283	